

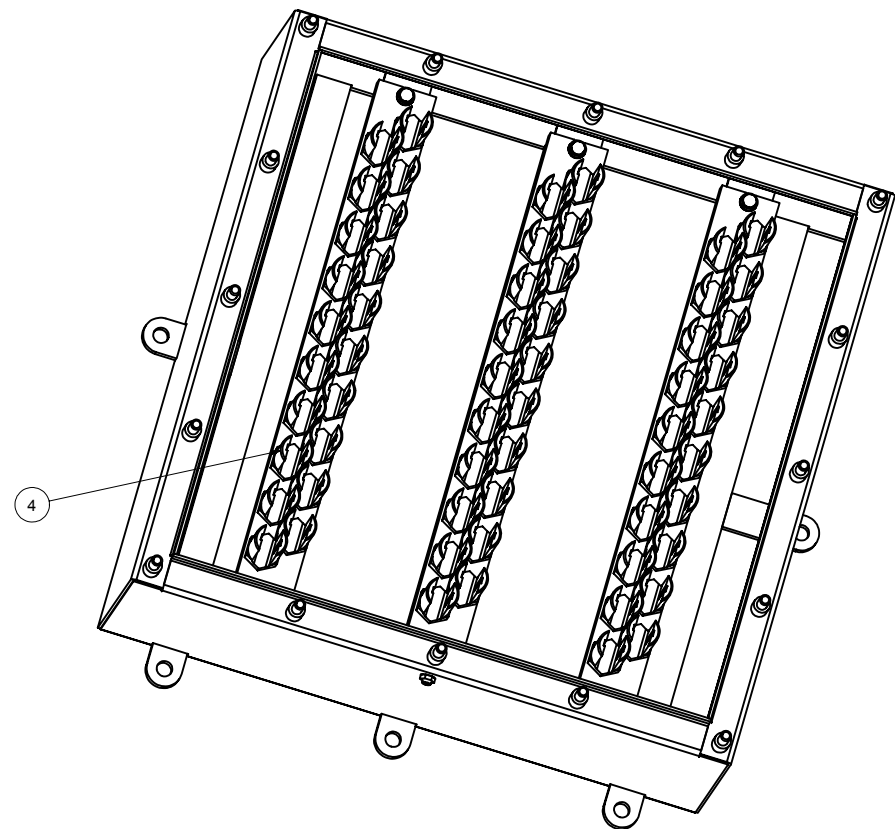
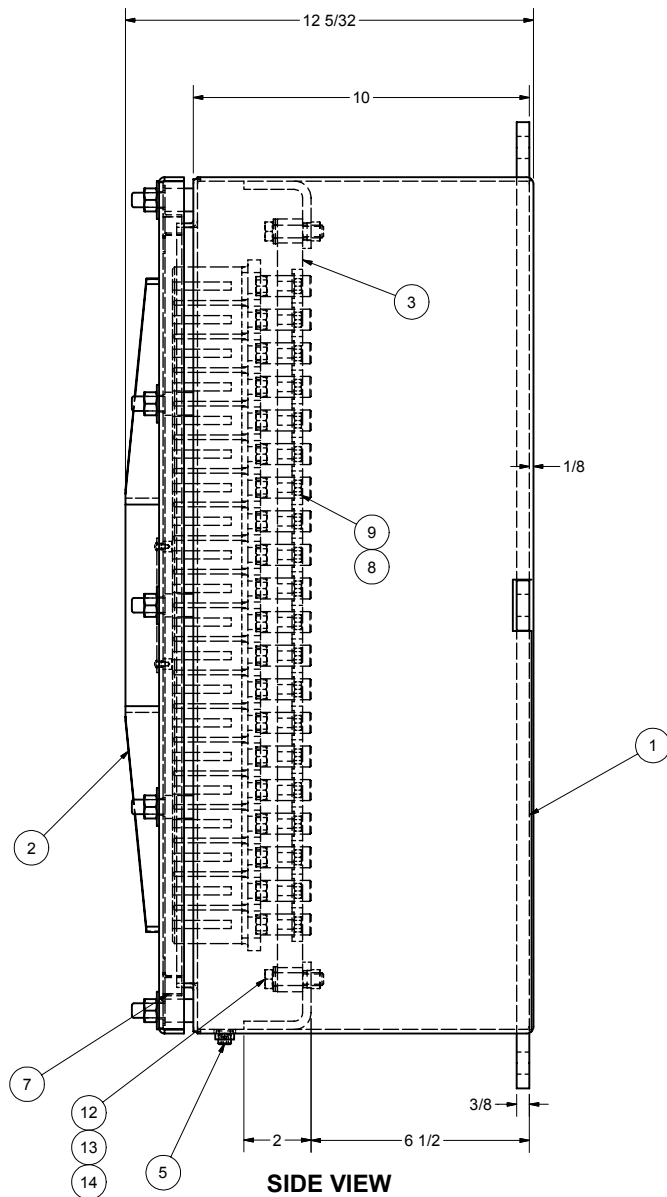


2		1		
		REVISIONS		
ZONE	REV	DESCRIPTION	DATE	AUTH

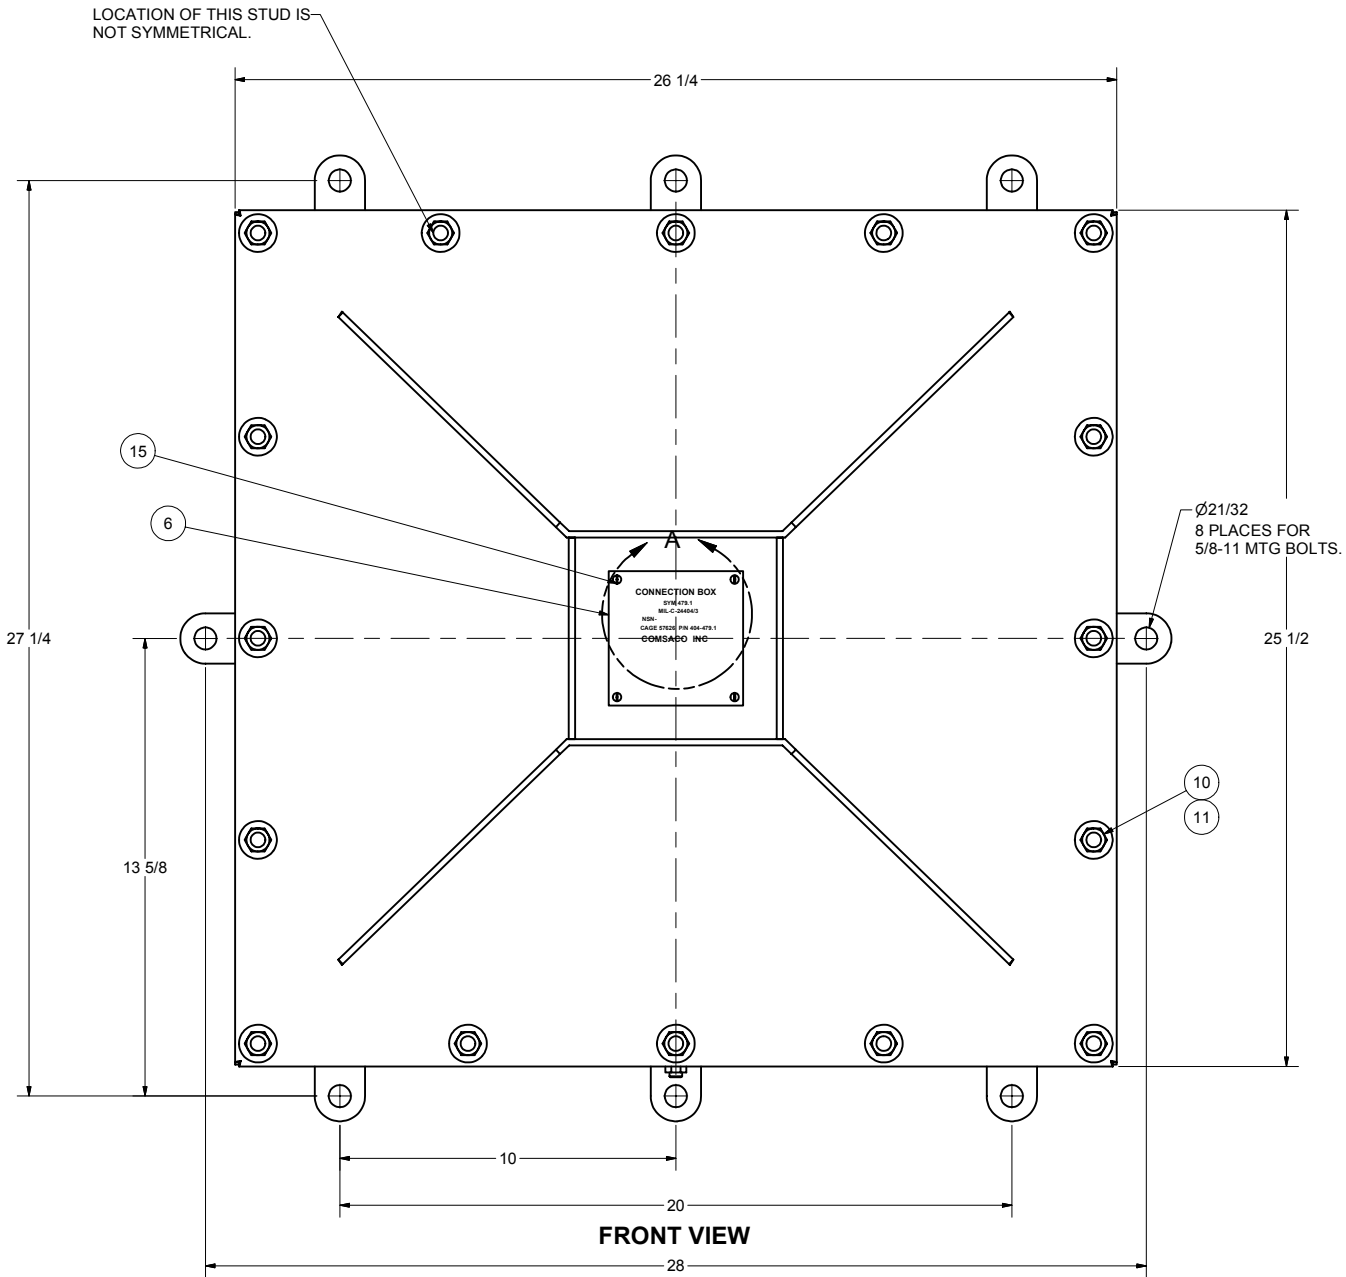

SYM 479.1 W/O COVER

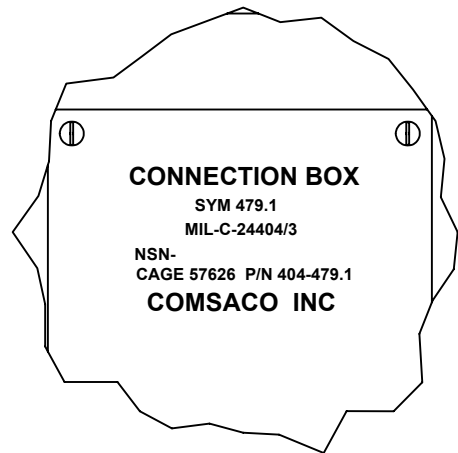

DETAIL A

- NOTES:
- TOTAL WEIGHT IS 130 LBS (EST).
 - ELECTRICAL RATING IS 250V, FOR 60 TERMINALS FOR A MAXIMUM OF 120 CABLES 6,500 TO 13,090 CM. (12-10 AWG)
 - UNLESS OTHERWISE SPECIFIED CABLE ENTRANCE DEVICES WILL BE PROVIDED BY THE INSTALLING ACTIVITY.
 - TESTS:
 - VIBRATION PER MIL-STD-167 TYPE I, EXPLORATORY, VARIABLE AND ENDURANCE UP TO 25HZ.
 - SHOCK PER MIL-S-901D: MEDIUM WEIGHT, HIGH IMPACT, GRADE A.
 - EFFECTIVENESS OF ENCLOSURE PER MIL-STD-108. (SBM-15FT).
 - FINISH AS FOLLOWS:
 - PRIME WITH ZINC-MOLYBDATE PER TT-P-645.
 - PAINT EXTERIOR WITH LIGHT GRAY ENAMEL.
 - PAINT INTERIOR WITH WHITE ENAMEL.
 - THIS DRAWING DEVELOPED FROM MIL-C-24404/3.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
+/- 1/64 .XX .XXX .005

Parts List				
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	1	200223	BOX WELDMENT, 11GA STEEL	
2	1	200224	COVER WELDMENT, 11GA STEEL	
3	3	100256-1	TERMINAL STRIP, 3/4" GME	
4	60	DGM-1L	TERMINAL, BRONZE OR BRASS	
5	1	73142-30	PLUG, PIPE, BRASS, 1/8" IPS, 3/16" HEX	
6	1	100244-9	ID PLATE, BRASS	
7	9	Z-R-SQR-0500-R900	RUBBER STRIP, 1/2" X 1/2" PER MIL-R-900	
8	60	X-ELW-CRES-0250	WASHER, EXT TOOTH, CRES, 1/4"	
9	60	X-NUT-CRES-0420	HEX NUT, CRES, 1/4-20	
10	16	X-NUT-CRES-716-14	HEX NUT, CRES, 7/16-14	
11	16	X-NUT-CRES-716	WASHER, FLAT, CRES, 7/16"	
12	6	X-BLT-SS-816-1.50	BOLT, HEX HEAD, CRES, 3/8-16 X 1-1/2"	
13	6	X-FLW-CRES-375	WASHER, FLAT, CRES, 3/8"	
14	6	X-ELW-CRES-375	WASHER, EXT TOOTH, CRES, 3/8"	
15	4	X-RHM-BRS-632-250	SCREW, RHM, BRASS, 6-32 X 1/4"	

DRAWN CHRIS WINDLEY	3/30/2005
CHECKED W WESTHOFF	4/14/2005
QA	
MFG	
APPROVED	

COMSACO, INC. NORFOLK, VA. 23502		TITLE	
		DEGAUSSING CONNECTION BOX, STEEL, SYM 479.1	
SIZE	CODE IDENT NO	DWG NO	REV
D	57626	404-479.1	-
SCALE		SHEET 1	OF 1

NEXT ASSY	USED ON
-----------	---------