


REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPROVED
A-1	A	PART NO. MS35059-24 WAS 35059-24 FOR		
A-2		ITEM NO. 5 SPEC DATA MS35059 WAS		
A-3		MS35059-24 FOR ITEM NO. 5 & MIL-P-		
B-1		25732 WAS MIL-P-5516 FOR ITEM NO. 3.	1-6-98	WJ
B-2		DELETED DATA FROM FINISH BLK.	1-15-98	
B-3		ADDED "1 LB" TO NOTE 2, E).		
C-1	B	CHG 1.0 PLATE CORNER FROM 45°	5-21-00	WJ
		ANGLE TO RADIUS.		

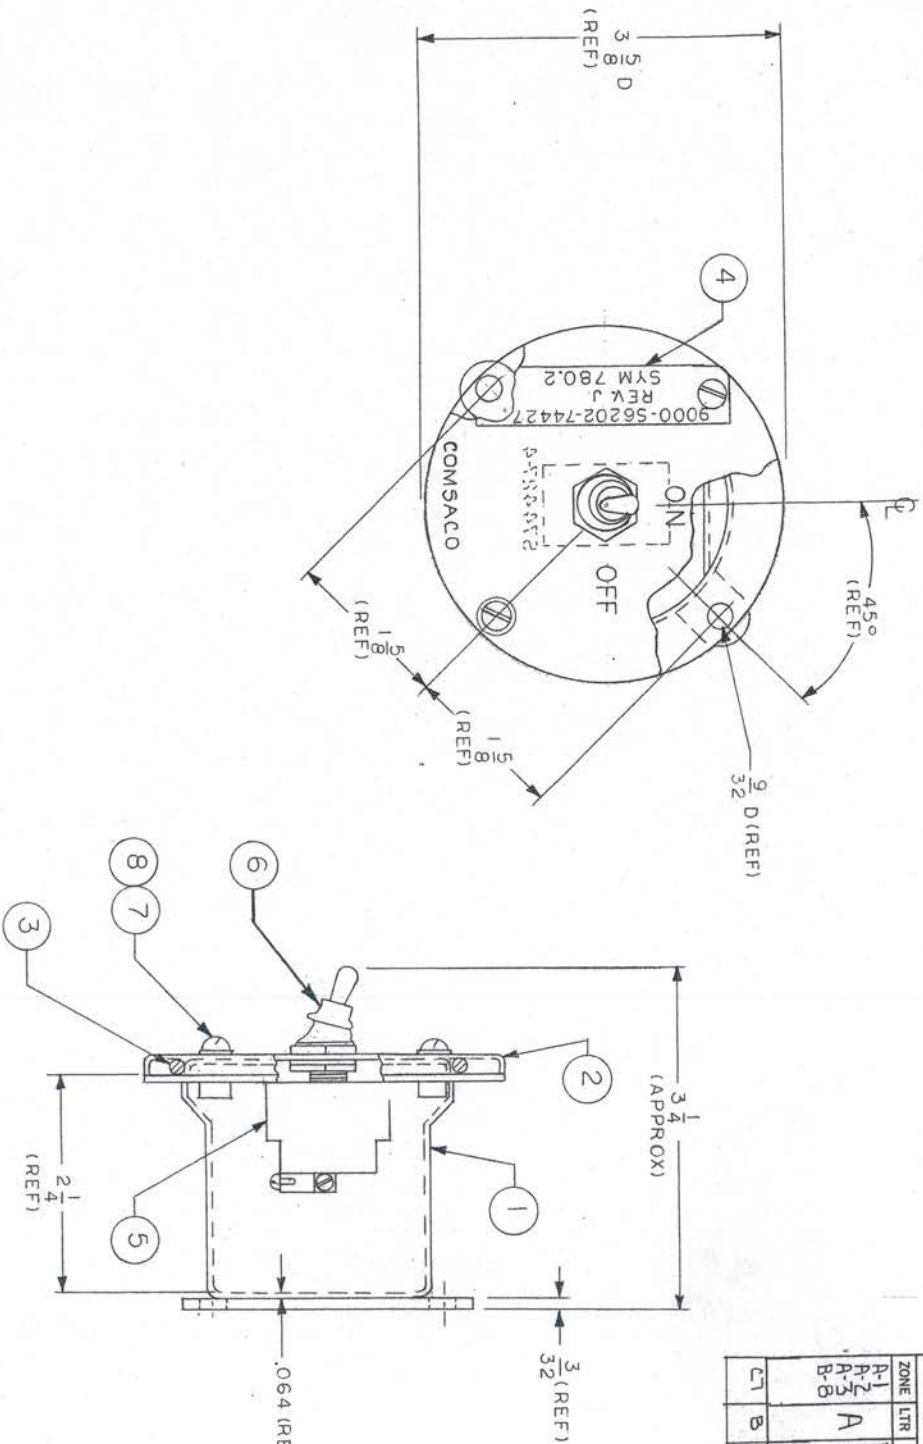

NOTES

- THIS DWG WAS DEVELOPED FROM 9000-56202-74427, REV J.
- RATINGS AND SPECIFICATIONS:
 - 125 VOLTS, 10 AMPS AC, 5 AMPS DC.
 - 4 TERMINALS, DPST.
 - ELECTRICAL INTERFACE AT TOGGLE SWITCH, 6-32 SCREW.
 - DEGREE OF ENCLOSURE: WATERTIGHT.
 - WEIGHT: 1 LB
- UNLESS OTHERWISE SPECIFIED, CABLE ENTRANCE DEVICES WILL BE PROVIDED BY THE INSTALLING ACTIVITY.
- INSPECTIONS AND TESTS:
 - VISUAL AND DIMENSIONAL EXAMINATION.
 - DIELECTRIC TEST AT 750 VAC.
 - OPERATIONAL TEST OF SWITCH, CONTINUITY TEST.
 - EFFECTIVENESS OF ENCLOSURE TEST PER MIL-STD-108, WATERTIGHT (3 FT).

SAMPLING PER MIL-STD-105 LEVEL II, AQL 1.5 FOR A, B, AND C LEVEL 5.4, AQL 4.0 FOR D

QTY	SYM	NOMENCLATURE OR DESCRIPTION	PART OR IDENTIFYING NO.	SPECIFICATION	MATERIAL OR NOTE	UNIT WT	ZONE	ITEM NO.
2		WASHER, FLAT, #8		COM'L	BRASS			8
4		RHMS, 8-32 X 1/2		COM'L	BRASS			7
1		BOOT, TYPE A, STYLE 381349	N1030B	MIL-B-5423/2	RUBBER			6
1		SWITCH, TOGGLE, DPST	98906	MS35059-24	MS35059			5
1		ID PLATE	57626	100307-1	BRASS			4
1		GASKET, O-RING	96306	MS28775-231	MIL-P-25732	RUBBER		3
1		COVER WELDMENT	57626	200181-101	BRASS			2
1		BOX WELDMENT	57626	200201	BRASS			1

LIST OF MATERIALS OR PARTS LIST

UNLESS OTHERWISE SPECIFIED	DRAWING STARTED	DATE
DIMENSIONS ARE IN INCHES		
TOLERANCES ON		
FRACTIONS		
DECIMALS		
ANGLES		
± 1/64		
± .005		

CHECKED	DATE
WJ	11-19-87

CHECKED	DATE
WJ	8-17-90

FINISH:	SIZE	CODE IDENT NO.	404-780.2	REV.
	D	57626		B